

Saniaccess 1-2-3

Macerators equipped with top access traps for easy servicing



Saniaccess 3
Saniaccess 2
Saniaccess 1



5 m
100 m



BY CONTACT



PRODUCT BENEFITS

- 3 models for all needs - WC only or for a complete bathroom.
- Easy maintenance with double access to the product.
- Ideal for rental properties.

CONNECTIONS

← Discharge diameter ext. : 22/28/32 mm

→ External inlet diameter : 40, 100 mm

• Direct access to the basket in case of blockage due to improper use of the device without dismantling the device and emptying the tank.



Single blade cutter




PACKAGING

Saniaccess, non-return valve, connectors, activated carbon filter included to neutralise odours

CURVE

Discharge height (m)

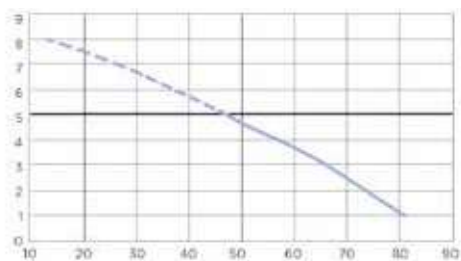


Flow rate (l/min)

TECHNICAL FEATURES


Number of entries	1	2	4
External inlet diameter		40, 100 mm	
Discharge diameter ext.		22/28/32 mm	
Min. shower tray height		15 cm	
Max. incoming temperature		35 °C	
Frequency Voltage		220-240 V - 50-60 Hz	
Motor power		400 W	
IP rating		IP44	
Electrical class		I	
Noise level		46 dB(A)	
Identification and logistics			
Gross weight		7 kg	
Factory code	SANIACCESS1	SANIACCESS2	SANIACCESS3

DIMENSIONS

Saniaccess 1-2



Saniaccess 3



Dimensions (mm)